



TC8x Series Technical Accessory Guide










NOTE: This document is only for general reference. Solution Builder and related PMBs should be used for product availability, pricing, and final solution selection.

* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.


Cradles and Charging

Cradles


Part Number	Picture	Description	Notes	Required Items
CRD-TC8X-2SUCHG-01		2-Slot USB/Charging ShareCradle	<ul style="list-style-type: none"> ▶ Will charge one TC8x and one spare battery ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...) ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. Use CRD-TC8D-2SUCHG-01 instead. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). ▶ USB Cable (25-124330-01R) for PC connection <p><u>Desk Mount Bracket (recommended)</u> 2-Slot Desk Mount Bracket (BRKT-SCRD-SSDK-01)</p>
KT-TC8-01		2-Slot USB/Charging ShareCradle Kit	<ul style="list-style-type: none"> ▶ Will charge one TC8x and one spare battery ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...) ▶ Includes: Single Slot Cradle (CRD-TC8x-2SUCHG-01), USB Cable (25-124330-01R), Power Supply (PWR-BGA12V50W0WW), and DC Line Cord (CBL-DC-388A1-01). ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. Use CRD-TC8D-2SUCHG-01 instead. 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00R). <p><u>Desk Mount Bracket (recommended)</u> 2-Slot Desk Mount Bracket (BRKT-SCRD-SSDK-01)</p>
CRD-TC8D-2SUCHG-01		2-Slot USB/Charging ShareCradle for TC8300 DPM devices	<ul style="list-style-type: none"> ▶ Only compatible with DPM (Direct Part Mark) versions of TC8300. ▶ Will charge one TC8300 DPM unit and one spare battery. ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...) 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R). ▶ USB Cable (25-124330-01R) for PC connection <p><u>Desk Mount Bracket (recommended)</u> 2-Slot Desk Mount Bracket (BRKT-SCRD-SSDK-01)</p>

MOD-MT2-EU1-01		USB to Ethernet Module	<ul style="list-style-type: none"> ▶ Attaches to 2-Slot USB/Charging ShareCradle (CRD-TC8x-2SUCHG-01) to provide Ethernet support ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. ▶ NOTE: As of 10/2016 the Ethernet Module hasn't been officially tested by Zebra Engineering with the 2-Slot ShareCradle. 	2-Slot USB/Charging ShareCradle (CRD-TC8X-2SUCHG-01)
CRD-TC8X-5SCHG-01		5-Slot Charge-Only ShareCradle	<ul style="list-style-type: none"> ▶ Will charge up to five TC8x units. ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc..) 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F) <p><u>Mounting Bracket</u> For Desktop: Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01) For Wall or Network Rack: Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>
CRD-TC8X-5SC4BC-01		5-Slot Charge-Only ShareCradle with Spare Battery Charging	<ul style="list-style-type: none"> ▶ Will charge up to four TC8x units and four spare batteries. ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc..) 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F) <p><u>Mounting Bracket</u> For Desktop: Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01) For Wall or Network Rack: Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>
CRD-TC8X-5SETH-01		5-Slot Ethernet/Charging ShareCradle	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Will charge and provide Ethernet connection for up to five TC8x units. ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc..). ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F) <p><u>Mounting Bracket</u> For Desktop: Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01) For Wall or Network Rack: Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>




CRD-TC8X-5SE4BC-01		5-Slot Ethernet/Charging ShareCradle with Spare Battery Charging	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Will charge and provide Ethernet connection for up to four TC8x units AND will charge four spare batteries ▶ NOT compatible with Snap-On accessories attached (e.g. audio cables, etc...). ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F) <p><u>Mounting Bracket</u> For Desktop: Multi-Slot Desk Mount Bracket (BRKT-SCRD-MSDK-01) For Wall or Network Rack: Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01)</p>
BRKT-SCRD-SSDK-01		2-Slot Desk Mount Bracket	<ul style="list-style-type: none"> ▶ Allows 2-Slot USB/Charging ShareCradle (CRD-TC8X-2SUCHG-01) to be mounted on a flat surface (i.e. desktop). ▶ This kit includes pair of stands for Deskplate (BRKT-SCRD-DKST-01) and Deskplate Bracket (BRKT-SCRD-SSPL-01) - NOTE: Zebra Demo Depot may stock as separate SKU's noted above. 	
BRKT-SCRD-MSDK-01		Multi-Slot Desk Mount Bracket	<ul style="list-style-type: none"> ▶ Allows Multi-Slot ShareCradles to be mounted on a flat surface (i.e. desktop). 	
BRKT-SCRD-SMRK-01		Multi-Slot Wall/Rack Mount Bracket	<ul style="list-style-type: none"> ▶ Allows for rack and wall mounting of one 5-Slot ShareCradle, up to two 2-Slot Cradles or up to four 4-Slot Battery Chargers. ▶ Bracket can be mounted on standard 19" network rack or on a wall. ▶ Cable routing slots & removable power supply holder tray. ▶ Adjustable tabs & screw mounts for easy hanging/installation with ability to support one 5-Slot ShareCradle or four 4-Slot Battery Chargers and their power supplies. ▶ Adjustable orientations - horizontal, vertical, angled. ▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket. 	
Battery Charging				
Part Number	Picture	Description	Notes	Required Items

SAC-TC8X-4SCHG-01		SAC-TC8X-4SCHG-01	<ul style="list-style-type: none"> ► Charges up to four spare batteries. ► Can be used standalone or up to four chargers can be installed on Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01) 	<p><u>To power single 4-slot Charger:</u></p> <ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WWW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R). <p><u>To power two sets of 4-slot Chargers from one power supply:</u></p> <ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V108W0WWW) ► DC Y-Cable Line Cord (CBL-DC-523A1-01) ► AC Line Cord (23844-00-00R)
-------------------	---	-------------------	---	---

Direct to Device Charging


Part Number	Picture	Description	Notes	Required Items
CBL-TC8X-USBCHG-01		Snap-on USB Communication/Charging Cable	<ul style="list-style-type: none"> ► Attaches to rear accessory port on TC8x ► Can't be used at same time as other Snap-on accessories 	Power Supply (PWR-BUA5V16W0WWW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging

Communication Cables

Part Number	Picture	Description	Notes	Required Items
25-124330-01R		USB Single-Slot ShareCradle to PC/Host cable	► Micro USB connection on cradle end	
CBL-TC8X-USBCHG-01		Snap-on USB Communication/Charging Cable	<ul style="list-style-type: none"> ► Attaches to rear accessory port on TC8x ► Can't be used at same time as other Snap-on accessories 	Power Supply (PWR-BUA5V16W0WWW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging
3rd party *		USB micro-A to USB A Female adapter	<ul style="list-style-type: none"> ► Allows the TC8x to act as a USB host to connect to devices like USB flash drives/memory sticks, mice, etc. ► Connects to 2-Slot USB/Charge ShareCradle 	

(see <http://www.cyberguys.com/product-details/?productid=33062>)

Snap-On Accessories

Part Number	Picture	Description	Notes	Required Items
CBL-TC8X-AUDQD-01		Snap-on Audio Adapter (Quick Disconnect jack/connector)	<ul style="list-style-type: none"> ► Allows TC8x to be used with wired headsets with Quick Disconnect jack (i.e. RCH51) ► For Voice Directed or PTT applications ► Includes two clips for attaching to clothing. Additional clips can be purchased separately. ► NOT compatible with other snap on accessories or cradles ► Cable length is approximately 15 inches (un-extended) 	Compatible headset


CBL-TC8X-AUDBJ-01		Snap-on Audio Adapter (3.5mm jack)	<ul style="list-style-type: none"> ▶ Provides 3.5mm barrel jack connector that is keyed/collared for a locking failsafe connection with matching cables and headsets. ▶ Not recommended for Voice Directed applications. Use Quick Disconnect cable instead. Can be used with PTT applications. ▶ Includes one clip for attaching to clothing. Additional clips can be purchased separately. ▶ NOT compatible with other snap on accessories or cradles ▶ Cable length is approximately 6 inches (un-extended) ▶ Includes Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01) 	Compatible headset
<p>23-80-09-TSO-A (for Agilion)</p> <p>23-80-09-TSO-U (for Ubisense)</p> <p>(3rd party) *</p> <p>http://tis-gmbh.de/en</p>		TIS snap-on RTLS Transponder	<ul style="list-style-type: none"> ▶ Provides Real-Time Location System (RTLS) tracking of the TC8x from various RTLS application providers. ▶ Transponder is powered from the TC8x ▶ Does not block access to camera. ▶ LED on snap-on indicates transponder is being powered. 	

Soft Goods - Cases/Holsters




Part Number	Picture	Description	Notes	Required Items
SG-TC8X-QDHLST-01		Quick-Draw Holster	<ul style="list-style-type: none"> ▶ Soft material ▶ TC8x is inserted nose down into holster ▶ Allows easy device insertion and removal. ▶ Adjustable orientation allows holster to be worn on left or right side of hip ▶ Includes Loop and tether point for optional stylus. ▶ Drain hole in case of inclement weather ▶ Not compatible with TC8x DPM (Direct Part Mark) configuration devices. Use SG-TC8D-QDHLST-01 instead. 	Belt for Holster (11-08062-02R)





<p>SG-TC8D-QDHLST-01</p>		<p>Quick-Draw Holster for TC8x DPM configurations</p>	<ul style="list-style-type: none"> ▶ Soft material ▶ TC8x is inserted nose down into holster ▶ Allows easy device insertion and removal. ▶ Adjustable orientation allows holster to be worn on left or right side of hip ▶ Includes Loop and tether point for optional stylus. ▶ Drain hole in case of inclement weather ▶ Only compatible with TC8x DPM (Direct Part Mark) configuration devices. ▶ Green stripe on holster distinguishes from non-DPM holster (SG-TC8X-QDHLST-01). 	<p>Belt for Holster (11-08062-02R)</p>
<p>SG-TC8X-PMHLST-01</p>		<p>Presentation Mode Holster</p>	<ul style="list-style-type: none"> ▶ Soft material ▶ TC8x is inserted handle down into holster ▶ Includes Loop and tether point for optional stylus. ▶ Holster uses magnet to put TC8x units equipped with proximity sensor into Hands Free Scanning mode. ▶ Two storage pockets hold spare batteries. ▶ Drain hole in case of inclement weather. ▶ Holster can be worn on belt using optional Belt for Holster or can be worn on body using optional Shoulder Strap which attaches to two D-clips on holster. ▶ NOTE: Requires TC8x with Proximity/Magnetic Sensor option. ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	<p>Belt for Holster (11-08062-02R) OR Shoulder Strap (WA6010 or 58-40000-007R)</p>




<p>A1214ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Holster - Wearable or Fixed Mount</p>	<ul style="list-style-type: none"> ▶ Durable Ballistic Nylon Holster. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Grommetted holes for fixed mounting. Includes two plastic cable tie-wraps. ▶ Includes loop on front for optional retractor for attachment to TC8X. ▶ Grommetted hole at bottom for easy in/out of unit and drainage. ▶ Stiffeners for structure and rigidity. ▶ Can be used with optional Waist Belt for Holster (A1227ST) 	
<p>AE2449DW (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Boot with Cell Phone Clip and D-Ring</p>	<ul style="list-style-type: none"> ▶ Buckled strap at bottom for quick on/off. ▶ Can be used on fork-lifts by using D-Ring at top of boot for attaching a pulley/ retractor. ▶ Can be worn on belt using rugged cell clip which allows for quick user attachment. 	<p>Use Tool Balancer/Pulley (50-15400-031) when attaching to forklifts.</p>
<p>11-08062-02R</p>		<p>Belt for Holster</p>	<ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Has improved buckle and softer belt material 	
<p>A1227ST (3rd party) *</p> <p>https://www.shilpitrading.com</p>		<p>Belt for Holster</p>	<ul style="list-style-type: none"> ▶ Belt is 2 inches wide ▶ Extends to 48 inches ▶ Quick on/off snap buckle 	
<p>V6198DW (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Belt Extender</p>	<ul style="list-style-type: none"> ▶ Used to extend the Belt Holster (11-08062-02R) an additional 10 inches 	
<p>WA6010</p>		<p>Shoulder Strap/Cross Body Strap</p>	<ul style="list-style-type: none"> ▶ 1.0" wide, 72" max. length 	





58-40000-007R		Shoulder Strap/Cross Body Strap	▶ 1.5" wide, 22 to 50" max. length	
---------------	---	---------------------------------	------------------------------------	--

Misc

Part Number	Picture	Description	Notes	Required Items
SG-TC7X-STYLUS-03 (pack of 3)		Stylus Kit with Tether	<ul style="list-style-type: none"> ▶ Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHR1-03) ▶ Conductive Carbon-filled plastic material w/ 5mm tip. ▶ Length of stylus is 3.5". ▶ Rigid plastic stylus is optimized for enterprise durability. ▶ Clip & tether point to reduce loss. Tether to optional Handstrap ▶ When not being used stylus can be stored in optional Holster 	
KT-TC7X-TETHR1-03 (pack of 3)		Replacement Coiled Tether for Stylus	▶ This tether is included with Stylus Kit with Tether (SG-TC7X-STYLUS-03)	
SG-ET5X-SLTETR-01 (single)		Replacement Coiled Tether for Stylus	▶ This tether is typically used with the ET5X series' stylus.	



SG-TC8X-HDSTP-01 (single)		Handstrap	<ul style="list-style-type: none"> ▶ Provides added safety against accidental drops of the device while on the move. ▶ Also provides a loop and tether point for the optional stylus. ▶ This handstrap is an optional accessory on TC8300 units. ▶ This handstrap is typically included with each TC8000 unit, so this would be a spare/replacement handstrap. 	
50-12500-066		Wrist Strap	<ul style="list-style-type: none"> ▶ Convenient lanyard-style wrist strap allows users to keep hands free to perform tasks and handle objects. ▶ Attaches to bottom of TC8x's handle. 	
50-15400-031		Tool Balancer/Pulley	Used when installing Boot with D-Clip (Ultima Case # AE2449DW) on a forklift	
MISC-TC8X-SCRN-01 (pack of 5)		Screen Protectors	▶ High durability screen protector	
Vehicle/Forklift Cradles and Holders				
NOTE: See Common Mounting System Accessories TAG for mounting brackets used with cradles and holders.				
Powered Cradles and Holders (provides device charging and/or communication)				
Part Number	Picture	Description	Notes	Required Items

<p>7160-1277-01</p> <p>Gamber Johnson (3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Gamber Johnson Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ▶ For use in enterprise, logistics, and material handling vehicles. ▶ Universal AMPs and NEC hole patterns for attaching Gamber-Johnson mounts, RAM mounts, and other brackets. ▶ Eliminate daily battery exchanges and device downtime by maintaining charge within your mobile work environment. ▶ Includes lock for theft deterrence. ▶ Patented slam latch technology allows single handed operation. ▶ Cable from cradle terminates with 15-pin D-sub connector. Additional pigtail cable from 15-pin D-sub to 1.7mm barrel jack connector included. ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	<p><u>To Power Cradle:</u> Via vehicle: ▶ <u>5V output</u> 3rd Party Lind Isolated Power Supplies available from Gamber-Johnson, available in inputs of 12-32VDC, 20-60VDC or 72-110VDC</p> <p>Via wall outlet: ▶ Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R)</p>
<p>7400-0013 (12-32 VDC input)</p> <p>7400-0014 (20-60 VDC input)</p> <p>7400-0015 (72-100 VDC input)</p> <p>Gamber Johnson (3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Lind 5V Isolated Power Supply for Gamber Johnson Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ▶ Typically used when powering Gamber-Johnson Charge-Only Vehicle Cradle (7160-1277-01) from a forklift. ▶ Provides 5V DC output required by cradle. 	
<p>7160-1277-02</p> <p>Gamber Johnson (3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Gamber Johnson Charge/Communication Vehicle Dock</p>	<ul style="list-style-type: none"> ▶ For use in enterprise, logistics, and material handling vehicles. ▶ Universal AMPs and NEC hole patterns for attaching Gamber-Johnson mounts, RAM mounts, and other brackets. ▶ Eliminate daily battery exchanges and device downtime by maintaining charge within your mobile work environment. ▶ Includes lock for theft deterrence. ▶ Patented slam latch technology allows single handed operation. ▶ Cable from cradle terminates with 15-pin D-sub connector which then connects to USB I/O Hub (SHARE-USBH-01), purchased separately. ▶ Dock includes mounting base for USB I/O Hub. ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	<p>▶ USB I/O Share Hub (SHARE-USBH-01)</p> <p><u>To Power Dock:</u> Via vehicle: ▶ For Forklifts (isolated power supply) - <u>12/24V output</u> 3rd party Lind power supply, available from Gamber-Johnson, available in inputs of 12-32VDC, 20-60VDC or 72-110VDC. ▶ For other vehicle types (non-isolated power supply) - Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/QLn Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01)</p>





SHARE-USBH-01		USB I/O Hub for Vehicle Data Communication Cradle	<ul style="list-style-type: none"> ▶ 15 pin connector on Hub connects to Gamber-Johnson Charge/Communication Vehicle Dock (7160-1277-02). ▶ Includes the following ports: <ul style="list-style-type: none"> - 3 standard USB A size ports - each can provide 1.5A current - supports DS3608-ER scanner in full power mode. - 1 USB A Charge-Only port - can provide 1.5A current for charging cell phones, tablets, headsets, etc. - 3.5mm headset jack ▶ Host device (TC8X) is automatically placed in USB Host mode ▶ Accepts 12/24V power from vehicle and provides power conditioning (SAE/ISO) to host device (TC8X) ▶ Hub must be powered externally for USB ports to be functional. 	▶ Gamber-Johnson Charge/Communication Vehicle Dock (7160-1277-02)
CHG-AUTO-CLA1-01		Cigarette Lighter Auto Charger Cable for Gamber-Johnson Charge/Communication Dock	<ul style="list-style-type: none"> ▶ 12/24V ▶ Includes tab on Barrel jack end for ensuring a reliable connection to SHARE-USBH-01, used with Gamber-Johnson Charge/Communication Dock (7160-1277-02). 	
CHG-AUTO-HWIRE1-01		Hard Wired Auto Charger Cable for Gamber-Johnson Charge/Communication Dock	<ul style="list-style-type: none"> ▶ 12/24V ▶ Includes tab on Barrel jack end for ensuring a reliable connection to SHARE-USBH-01, used with Gamber-Johnson Charge/Communication Dock (7160-1277-02). ▶ Bare wire end connects directly to vehicle power source. ▶ Approximate cable length is 13 ft. 	
CBL-TC7X-GFS-01		Legacy Vehicle Cradle Power Adapter Cable for Gamber-Johnson Charge/Communication Dock	<ul style="list-style-type: none"> ▶ Allows SHARE-USBH-01, used with Gamber-Johnson Charge/Communication Dock (7160-1277-02), to be powered from power cables from legacy Zebra device vehicle cradles including: MC5x/MC6x, MC7x, MC9x-Brick, MC9x-Short, or MC95 which use cable SKUs 25-128973-01R, 25-61987-01R, or 25-128974-01R. ▶ Cable length is 11.5" ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	




<p>VAM-MPP-VHCH1-01</p>		<p>Vehicle Charger Cable for Gamber-Johnson Charge/Communication Dock and ZQ500/ZQ600/QLn Series Printers</p>	<p>►Charger with charge both: (1) SHARE-USBH-01, used with Gamber-Johnson Charge/Communication Dock (7160-1277-02) (2) a ZQ500 or ZQ600/QLn series printer</p> <p>► Includes the following: (1) Power Supply (P1093358) which has square locking connector and one USB-A port which can be used to charge an additional device. (2) cable for charging TC7X Vehicle Cradle (includes tab on Barrel jack end for ensuring a reliable connection to the cradle) and ZQ500/QLn printer (3) cable for charging TC7X Charging Cable Cup, Serial/Charge Cable, or USB/Charge Cable Cups and ZQ500/ZQ600/QLn printer. (4) Cigarette Lighter Adapter power cord (5) Hard Wired (bare wire) power cord</p> <p>Choose preferred charging cable (2) or (3) and preferred power cord (4) or (5)</p>	
<p>(12-32 VDC input) 16412 (20-60 VDC input) 16515 (72-110 VDC input) Gamber Johnson (3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Lind 12V Isolated Power Supply for Gamber-Johnson Charge/Communication Dock</p>	<p>► Typically used when powering Gamber-Johnson Charge/Communication Vehicle Dock (7160-1277-02) from a forklift. ► Provides 12V DC output required by dock.</p>	
<p>Un-Powered Cradles and Holders (passive holders, no charging support)</p>				
Part Number	Picture	Description	Notes	Required Items
<p>MNT-TC8X-FLCH-01</p>		<p>Fork Lift Cradle with Swivel Lock (un-powered)</p>	<p>► Holds TC8x for convenient mounting on fork lift when not in use. ► Spring loaded design allows for quick insertion and removal from cradle. ► Features swivel lock feature allowing the cradle to be easily rotated and locked in place for using the TC8x in landscape or portrait mode. ► Cradle also features vibration damper to protect the device under extreme shock and vibration conditions. ► Does NOT charge TC8x. ► Mount ready via AMPS hole pattern. ► Not compatible with DPM (Direct Part Mark) versions of TC8300.</p>	<p>Typically requires AMPS compatible mounting brackets. Can also be ordered in a kit (MNT-TC8X-FMKT6-01 or MNT-TC8X-FMKT6-01) which contain these components.</p>

<p>MNT-TC8X-FMKT6-01 (with 6" pedestal arm)</p> <p>MNT-TC8X-FMKT8-01 (with 8" pedestal arm)</p>		<p>Fork Lift Cradle with Swivel Lock KIT (un-powered)</p>	<ul style="list-style-type: none"> ▶ Holds TC8x for convenient mounting on fork lift when not in use. ▶ Spring loaded design allows for quick insertion and removal from cradle. ▶ Installs on a roll bar or square surface of the forklift. ▶ Features swivel lock feature allowing the cradle to be easily rotated and locked in place for using the TC8x in landscape or portrait mode. ▶ Cradle also features vibration damper to protect the device under extreme shock and vibration conditions. ▶ Does NOT charge TC8x ▶ Kit includes the following: <ul style="list-style-type: none"> - Fork Lift Cradle, Extreme Duty with Swivel Lock (MNT-TC8X-FLCH-01) - Proclip Clamp Mount (3PTY-PCLIP-215677) - Proclip Pedestal Arm with 90° Offset (6" long Arm 3PTY-PCLIP-215885 used on MNT-TC8x-FMKT6-01) (8" long Arm 3PTY-PCLIP-215886 used on MNT-TC8x-FMKT8-01) ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	
<p>MNT-TC8X-FH-01</p>		<p>Fork Lift Cradle, fixed position (un-powered)</p>	<ul style="list-style-type: none"> ▶ Holds TC8x for convenient mounting on fork lift when not in use. ▶ Spring loaded design allows for quick insertion and removal from cradle. ▶ Cradle can be rotated for using the TC8x in landscape or portrait mode by rotating from the cradle clamp mount used to attach to vehicle. ▶ Does NOT charge TC8x. ▶ Mount ready via AMPS hole pattern ▶ Uses ProClip Spring Loaded Holder (510874). ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	<p>Typically used with ProClip Forklift/Vehicle Cradle Clamp Mount - for square frame mounting (3PTY-PCLIP-241478). Can be ordered as a kit which includes this clamp mount.</p>





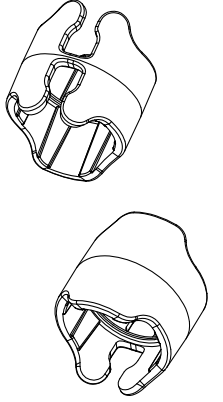
<p>MNT-TC8X-FHKT-01</p>		<p>Fork Lift Cradle, fixed position KIT (un-powered)</p>	<ul style="list-style-type: none"> ▶ Holds TC8x for convenient mounting on fork lift when not in use. ▶ Spring loaded design allows for quick insertion and removal from cradle. ▶ Cradle can be rotated for using the TC8x in landscape or portrait mode by rotating from the cradle clamp mount used to attach to vehicle. ▶ Installs on a roll bar or square surface of the forklift and allows the device to be used in landscape or portrait mode by rotating the cradle from the clamp mount. ▶ Does NOT charge TC8x ▶ Kit includes the following: <ul style="list-style-type: none"> - Fork Lift Cradle, Standard Duty, fixed position (MNT-TC8X-FH-01) - Proclip Clamp Mount (3PTY-PCLIP-241478) ▶ Uses ProClip Spring Loaded Holder (510874). ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	
<p>various (3rd party) *</p> <p>http://www.proclipusa.com/category/zebra</p>		<p>Additional Vehicle Cradles (un-powered)</p>	<ul style="list-style-type: none"> ▶ Holds TC8x for convenient mounting on vehicles / fork lifts when not in use. ▶ Versions available with these features: <ul style="list-style-type: none"> - Fixed Mount or Tilt & Swivel - With or without vibration damper - With or without top support for securely holding device in cradle. ▶ Mount ready via AMPS hole pattern. 	<p>Mount on vehicle using ProClip Pedestal or Forklift Mount</p>





<p>7160-1277</p> <p>Gamber Johnson (3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Gamber Johnson Forklift Holder (un-powered)</p>	<ul style="list-style-type: none"> ▶ For use in enterprise, logistics, and material handling vehicles. ▶ Universal AMPs and NEC hole patterns for attaching Gamber-Johnson mounts, RAM mounts, and other brackets. ▶ Includes lock for theft deterrence. ▶ Patented slam latch technology allows single handed operation. ▶ Not compatible with DPM (Direct Part Mark) versions of TC8300. 	
<p>MNT-TC8X-CMKT-01</p>		<p>Cart Mount Cradle Kit (un-powered)</p>	<ul style="list-style-type: none"> ▶ Enables hands-free scanning for pickers who use carts (pallet/warehouse/utility/shopping carts) ▶ Bracket clamps onto cart and holds TC8x for convenient presentation mode operation. ▶ Cradle uses magnet to put TC8x units equipped with proximity sensor into Hands Free Scanning mode. ▶ Allows installation on carts with up to 2" diameter rail/bar. ▶ Does NOT charge TC8x ▶ Not designed for forklift mount installations ▶ Kit includes the following: <ul style="list-style-type: none"> - TC8x Cart Mount Cradle (MNT-TC8x-CTPH-01) - RAM 2.5 in. round ball base (RAM-B-202U) - RAM double socket arm (RAM-B-201U) - RAM small tough-claw with 1" diameter base (MNT-RAM-B400U - RAM SKU #RAP-B-400U) 	
<p>MNT-TC8X-DKPH-01</p>		<p>Desktop Stand (un-powered)</p>	<ul style="list-style-type: none"> ▶ Stand holds TC8x for convenient presentation mode operation on flat surfaces (i.e. desktop). ▶ Stand uses magnet to put TC8x units equipped with proximity sensor into Hands Free Scanning mode. ▶ Does NOT charge TC8x 	
<p>Headset/Audio Accessories</p>				
<p>NOTE: Snap-On Audio audio adapter required to use wired headsets with all TC8x series devices - see Snap-On Accessories section above</p>				
Part Number	Picture	Description	Notes	Required Items


<p>HDST-35MM-PTT1-01</p>		<p>PTT and VoIP Headset (3.5mm Standard jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony ▶ Uses standard 3.5mm jack. ▶ Rotating earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. ▶ NOTE: Use of Locking connector headset (HDST-35MM-PTVP-01) is recommended. 	<p>3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)</p>
<p>HDST-35MM-PTVP-01</p>		<p>PTT and VoIP Headset (3.5mm Locking jack)</p>	<ul style="list-style-type: none"> ▶ For Push-To-Talk (PTT) and VoIP telephony ▶ Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection. ▶ Rotating earpiece allows for right or left ear configuration ▶ Built-in cord wrap ▶ mono with microphone ▶ includes clip for attaching PTT button to clothing. 	<p>3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)</p>
<p>HS2100-OTH</p>		<p>HS2100 Rugged Wired Headset (Over the Head headband)</p>	<ul style="list-style-type: none"> ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene 	<p>Requires one of the following cable options: (1) HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01) AND TC8x to 3.5mm Snap-On Adapter (CBL-TC8X-AUDBJ-01) OR (2) Quick Disconnect Headset cable (CBL-HS2100-QDC1-02) AND TC8x to Quick Disconnect Adapter Cable (CBL-TC8X-AUDQD-01)</p> <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>
<p>HS2100-BTN-L</p>		<p>HS2100 Rugged Wired Headset (Behind the Neck Left headband)</p>	<ul style="list-style-type: none"> ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene 	<p>Requires one of the following cable options: (1) HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01) AND TC8x to 3.5mm Snap-On Adapter (CBL-TC8X-AUDBJ-01) OR (2) Quick Disconnect Headset cable (CBL-HS2100-QDC1-02) AND TC8x to Quick Disconnect Adapter Cable (CBL-TC8X-AUDQD-01)</p> <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>

<p>VR12 (3rd party) *</p> <p>http://www.blueparrott.com</p>		<p>BlueParrott VR12 Wired Noise Cancelling Headset</p>	<ul style="list-style-type: none"> ▶ Audio accuracy for voice picking and other speech recognition applications. ▶ High quality durability stands up to all-day, every-day use. ▶ Lightweight design is easy and comfortable to wear all day. ▶ Compatible with most major wearable computers and devices used in voice-picking environments. ▶ G type (GN Netcom) Quick Disconnect. ▶ Convertible design gives choice of over-the-head and behind-the-neck wearing styles. 	<p>Quick-Disconnect Snap-on Audio Adapter (CBL-TC8X-AUDQD-01)</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS3100 Rugged Bluetooth Headset</p>	<ul style="list-style-type: none"> ▶ HD Voice, also known as Wide Band Audio, brings incredible audio clarity ▶ Built to handle the everyday inevitable drops ▶ Dustproof, sprayproof and waterproof ▶ Ready for the freezer and outdoor subzero temperatures ▶ Feather-light for extraordinary comfort ▶ Noise cancellation for a superior voice experience in the noisiest environments ▶ Swap batteries on the fly – without losing the Bluetooth connection ▶ Split-second tap-to-pair simplicity using NFC. ▶ Detachable swivel boom minimizes costs. ▶ Swivelling boom mutes microphone allowing users to prevent voice pick applications from recognizing non-voice pick conversations. ▶ User-replaceable pads and windscreens maximize comfort and hygiene ▶ 15 hours of battery power 	<p>See HS2100/HS3100 Accessories Document for headset accessories</p>
<p>various Bluetooth models B550-XT B350-XT C400-XT C300-XT</p> <p>(3rd party) *</p> <p>http://www.blueparrott.com</p>		<p>BlueParrott Bluetooth Headsets</p>	<ul style="list-style-type: none"> ▶ Various Bluetooth models available with options that include: <ul style="list-style-type: none"> - Blocking out 96% of background noise - Over 24 hours of talk time - NFC Tap to Pair capable - Bluetooth wireless range capable up to 300 ft. - Convertible wearing options: over the head, behind the neck. <p>See BlueParrot site for model specific options.</p>	





<p>APTT1 (3rd party) *</p> <p>https://www.aina-wireless.com/</p>		<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Features several buttons which the application developers can assign to different functions. ▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts. ▶ Device is ruggedized, MIL-STD 810G and IP67. ▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ Can be easily paired to mobile computer using NFC tap-to-pair. 	
<p>H3-B-1 (3rd party) *</p> <p>https://www.dellking.com</p>		<p>Wandfu H3 Push-To-Talk (PTT) Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. 	
<p>BTR-155 (3rd party) *</p> <p>K551011 (Zebra orderable SKU) ▶ Discontinued 3/2019, now order from Savox</p> <p>https://www.savoxaccessories.com</p>		<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Rugged wireless speaker microphone IP55. ▶ Allows cable-free movement ▶ Familiar speaker microphone functions; PTT and volume buttons ▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ LED status indication ▶ High speaker volume ▶ Includes: <ul style="list-style-type: none"> - Savox RSM - Modular Wired earpiece - Wall Charger - USB Cable - Quick Start Guide - Carrying Strap 	

<p>BTH-101 (3rd party) *</p> <p>https://www.savoxaccessories.com</p>		<p>Savox Push-To-Talk (PTT) Bluetooth Headset</p>	<ul style="list-style-type: none"> ▶ Bluetooth headset designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Also operates as standard Bluetooth headset for taking phone calls. ▶ Device is lightweight and ruggedized, IP55. 	
<p>CBL-HS2100-3MS1-01</p>		<p>HS2100 Headset Standard Cable (3.5 mm jack)</p>	<ul style="list-style-type: none"> ▶ 3.5mm barrel jack connector ▶ For use with TC7X, TC8X, or other devices using a 3.5mm barrel jack audio connector ▶ Cable is 43" (1.1 M) long ▶ Rugged cable with rugged connectors that are collared/keyed for failsafe connectivity. 	<p>3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)</p>
<p>CBL-HS2100-QDC1-02</p>		<p>HS2100 Quick Disconnect Cable</p>	<ul style="list-style-type: none"> ▶ For use when connecting HS2100 to devices using standard Quick Disconnect jack. ▶ Cable length is approximately 33" (84 cm). ▶ Has improved quick disconnect connector and strain relief vs. CBL-HS2100-QDC1-01. 	<p>TC8x to Quick Disconnect Adapter Cable (CBL-TC8X-AUDQD-01)</p>
<p>ADP-35M-QDCBL1-01</p>		<p>RCH50/RCH51 Headset Adapter Cable</p>	<ul style="list-style-type: none"> ▶ Connects RCH50/RCH51 headset (or headsets with Quick-Disconnect connector) to devices with 3-pole 3.5mm barrel jack connector. ▶ Cable features a rugged keyed/collared jack for a locking failsafe connection. ▶ Recommend using Quick-Disconnect Snap-On Audio Adapter (CBL-TC8X-AUDQD-01) instead. 	<p>3.5mm Snap-on Audio Adapter (CBL-TC8X-AUDBJ-01)</p>
<p>ADP-LOCK-3.5HT1-01</p>		<p>Spare/Replacement 3.5mm Audio Adapter Retention and Anti-Rotation Lock</p>	<ul style="list-style-type: none"> ▶ This clip is used with the Snap-on 3.5mm Audio Adapter (CBL-TC8X-AUDBJ-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection. ▶ Clip is normally included with the Snap-on Adapter, this is a spare/replacement clip/lock. ▶ NOTE: This is a Spare/Service Parts item. Contact an authorized Zebra reseller to order. 	
<p>Power Cords/Power Supplies</p>				
Part Number	Picture	Description	Notes	Required Items

CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used along with Power Supply PWR-BGA12V50W0WW to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger. ▶ Cable length is 1.8 meters 	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power 2-Slot ShareCradle w/Spare Battery Charger and SACX000 4-Slot Battery Charger ▶ 100-240 VAC, 12V, 4.16A, 50W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-148R 	DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> ▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) 	AC Line Cord (23844-00-00R)
CBL-DC-383A1-01		DC Line Cord	<ul style="list-style-type: none"> ▶ Used to power Snap-On USB/Charge Cable with Power Supply PWR-BUA5V16W0WW ▶ Cable length is 6 ft. 	
PWR-BUA5V16W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used with Snap-On USB/Charge Cable ▶ 100-240VAC, 5.4V, 3A, 16W ▶ Meets US DOE Level VI efficiency standard ▶ Replaces PWRS-14000-249R 	DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW) ▶ Unlike CBL-DC-382A1-01, this cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles. 	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW). 	
CBL-DC-523A1-01		2-Way DC Y Power Cord	<ul style="list-style-type: none"> ▶ Used to power two 4-Slot Battery Chargers with one Power Supply (PWR-BGA12V108W0WW) 	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power 5-Slot ShareCradles ▶ 100-240 VAC, 12V, 9A, 108W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-241R 	DC Line Cord (CBL-DC-382A1-01 or CBL-DC-523A1-01) and AC Line Cord (23844-00-00R)
23844-00-00R		AC Line Cord	<ul style="list-style-type: none"> ▶ Used with power supplies listed above. ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	

50-16000-182R		AC Line Cord	<ul style="list-style-type: none"> ▶ Used with PWRS-14000-249R/PWR-BUA5V16W0WW to power Snap-on charging cables. ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	
---------------	---	--------------	--	--

Batteries

Part Number	Picture	Description	Notes	Required Items
BTRY-TC8X-70MA1-01 (single) BTRY-TC8X-70MA1-10 (10 pack) BTRY-TC8X-70MA1-IN (for use in India - single)		TC8x Spare Battery with PowerPrecision+ (7000 mAh) 	<ul style="list-style-type: none"> ▶ All TC8300 units originally ship with this battery. ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Compatible with TC8000 and TC8300 	
BTRY-TC8X-67MA1-01 (single) BTRY-TC8X-67MA1-10 (10 pack)		TC8x Spare Battery with PowerPrecision+ (6700 mAh) 	<ul style="list-style-type: none"> ▶ To be discontinued 5/2020, now use BTRY-TC8X-70MA1-01 - see PMB 10372. ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). ▶ Compatible with TC8000 and TC8300 	