

APEXA® G



Features




- Low-Power High-Performance Intel® Celeron® J1900/J3455 Quad-Core Processor, Fanless
- Sleek and Compact Body with Small Footprint
- 15" Bezel-Free True-Flat Display with PCAP Touch
- LED Backlight Delivering Bright and Crisp Images
- Multiple I/O Interfaces for Peripherals
- Flexible Installation on a Counter or a Wall
- Faster Installation and Serviceability

Specifications

System	Processors	Intel® Celeron® J1900 (2M Cache, 2.0/2.42 GHz(Burst), 4 Cores), Fanless Intel® Celeron® J3455 (2M Cache, up to 2.3 GHz, 4 Cores), Fanless
	Chipset	J1900 Intel® Bay Trail J3455 Intel® Apollo Lake
	Memory	4GB Standard, DDR3L 1600 MT/s, Socket 1 x SODIMM
	Storage	SATA 2 (3Gb/s) 2.5 inch SSD 64GB, Support AHCI
	Operating Systems	J1900 Windows 7, Windows 8.1, Windows 10 IoT Enterprise, POS Ready 7 J3455 Windows 10 IoT Enterprise
	Audio	Realtek ALC662-VD
Display	Type	15" TFT LCD, LED Backlight
	Resolution	1024 x 768
	Brightness	300 cd/m ² (typ.)
	Touchscreen	Projective Capacitive Touch
Interface	Display	1x VGA (With Power Output)
	USB	6 (Rear 2, Back 4, USB 2.0 x 6) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45
	Serial	6 (COM1 with 5V/12V Power Output on 9 Pins, BIOS) (COM2-3 RJ-45, Full Signal) (COM4 RJ-11, Only TX/RX, 12V Power Output, Reserved for CDP) (COM5 Reserved for Cash Drawer Port) (COM6 RJ-45, Only TX/RX, 5V Power Output, Reserved for MSR)
	LAN	1x Gigabit Ethernet, RJ-45
	Audio	1x Line-out
	Power DC-IN	1x (4 Pin Connector)
Power	Power Supply	Adaptor 12V, 5A
Physical & Environmental	Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity
	Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity
	Dimensions (W x H x D)	364 x 333 x 210 (mm), 14.3 x 13.1 x 8.2 (in)
	Packing Dimensions (W x H x D)	500 x 470 x 300 (mm), 19.6 x 18.5 x 11.8 (in)
	Net Weight	5,300g, 11.6lbs
	Packing Weight	8,000g, 17.6lbs
	Certification	CE, FCC, KC, CB, CCC
	Color	Matte Dark Grey, High Gloss White
Options & Peripherals	2nd Displays	9.7", 12.1", 15" LCD Display, 1024 x 768, Optional Touchscreen
	Customer Display	VFD, 20 Columns x 2 Lines
	I/O Expansion	1x COM5 (RJ-45 8 Pins) (Factory Option) 1x Cash Drawer Port (Factory Option)
	Storage	2.5 inch SSD 128GB, HDD 500GB, 1TB
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
	Smart Card Reader	EMV Level 1, 2
	Dallas	Dallas i-button Reader
	Fingerprint	Yes
	Camera	5M USB Interface (Internal) (Factory Option)
	Wall Mount Kit	VESA-Compatible, 75 x 75 (mm), 100 x 100 (mm)
	Serial Conversion Cable	RJ-45 to D-sub 9
Speaker	2 x 0.8W (Stereo) (Factory Option)	


Dimensions

Unit : mm

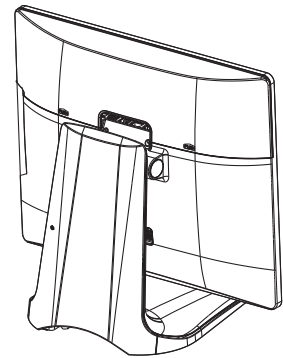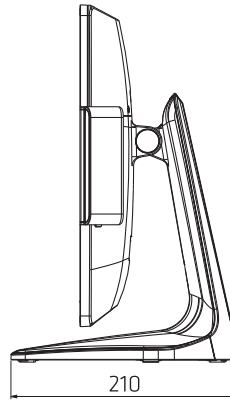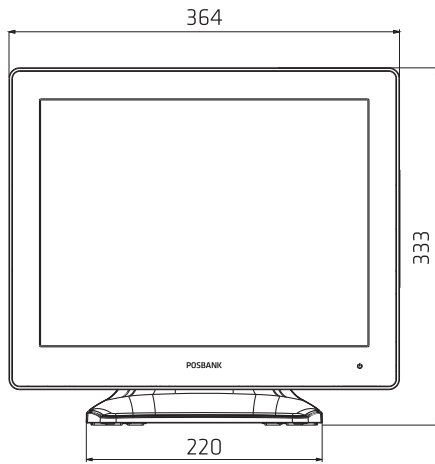

I/O Interfaces

J19



- | | |
|-------------------------|---------------|
| ① COM 1 | ⑥ LAN |
| ② COM 2 | ⑦ USB 2.0 x 2 |
| ③ COM 3 | ⑧ VGA |
| ④ COM 4 | ⑨ MSR |
| ⑤ Power Connector / 12V | ⑩ AUDIO OUT |

Ordering Information

Part No.	Description
APEXA G (G)	Intel Celeron J1900 Quad-Core, DDR3 4GB, SSD 64GB, 15" P-CAP Touch, Dark Grey, No O/S
IPO-MS 237 C AX_G	MSR, Dark Grey
IPO-MS 237E2_SCR_AX	MSR + SCR, Dark Grey
IPO-MS 237DIB_AX_G	MSR + i Button, Dark Grey
APEXA_9.7 (G)	9.7" 2nd Display, Dark Grey, No Touch
APEXA_12.1 (D/G)	12.1" 2nd Display, Dark Grey, No Touch
APEXA_15 (D/G)	15" 2nd Display, Dark Grey, No Touch
APEXA_CDP (G)	Customer Display(VFD), Dark Grey
AXP-06 BRACKET_WALL MOUNT	Wall Mount

Peripherals



2nd Display
• 9.7", 12.1", 15" LCD



Customer Display
• VFD (2 Line x 20 Characters)



Card Reader
• MSR, SCR

POSBANK®

www.posbank.com sales@posbank.com

2021.2Q EN(2104-001)

Copyright ©2021 POSBANK Co., Ltd.

POSBANK and the POSBANK logo are trademarks of POSBANK in the United States and other countries. All trademarks are the property of their respective owners. Intel, Celeron, Core are registered trademarks of Intel Corporation in the United States and other countries. Microsoft, Windows 7, Windows 8.1, Windows 10 IoT Enterprise and POS Ready 7 are registered trademarks of Microsoft Corporation in the United States and other countries. POSBANK shall not be liable for technical or editorial errors or omission contained herein. The information in this publication is informational purposes only and may be altered or amended by POSBANK. All statements regarding POSBANK's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.