


















# B360 FULLY RUGGED NOTEBOOK

- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 12th Generation Intel® Core™ Processor
- 13.3" FHD LumiBond® display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport™ battery swappable technology
- Thunderbolt™ 4 brings lightning speed and performance

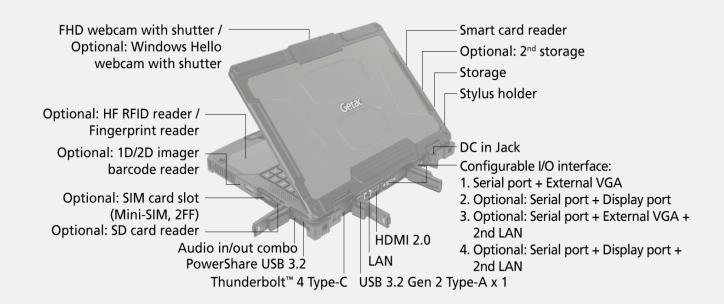

#### **SPECIFICATIONS**

### Generation

Operating System Windows 11 Pro

**Mobile Computing Platform** 

Intel<sup>®</sup> Core<sup>™</sup> i5-1240P Processor Max. 4.4GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Platform options: Intel® Core™ i5-1250P vPro® Processor Max. 4.4GHz with Intel® Turbo Boost Technology

- 12MB Intel® Smart Cache

Intel<sup>®</sup> Core™ i7-1260P Processor Max. 4.7GHz with Intel® Turbo Boost Technology

- 18MB Intel® Smart Cache

Intel<sup>®</sup> Core<sup>™</sup> i7-1270P vPro<sup>®</sup> Processor Max. 4.8GHz with Intel® Turbo Boost Technology

- 18MB Intel® Smart Cache

Intel® Core™ i7-1280P vPro® Processor Max. 4.8GHz with Intel® Turbo Boost Technology

- 24MB Intel® Smart Cache

VGA Controller

Intel<sup>®</sup> Iris<sup>®</sup> X<sup>e</sup> Graphics

Display 13.3" Wide Viewing Angle TFT LCD FHD (1920 x

Protection film

1,400 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen

Storage & Memory 8GB DDR4

Optional: 16GB / 32GB / 64GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD Optional 2<sup>nd</sup> storage <sup>ii</sup>: 256GB / 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard

**Pointing Device** 

Touchscreen

Capacitive multi-touch screen

Touchpad

- Touchpad with two buttons

**Expansion Slots** 

Smart card reader x 1

Optional: SD card reader x 1 Optional: 1D / 2D imager barcode reader

I/O Interface

FHD webcam x 1 Audio in/out combo x 1 DC in Jack x 1 PowerShare USB 3.2 x 1 USB 3.2 Gen 2 Type-A x 1 Thunderbolt™ 4 Type-C x 1

LAN (RJ45) x 1 HDMI 2.0 x 1 Docking connector x 1

Optional: SIM card slot x 1 (Mini-SIM, 2FF) Optional: Windows Hello face-authentication camera (front-facing) x 1 xv

Optional: RF antenna pass-through for GPS, WWAN and WLAN

WWAN and WLAN
Configurable I/O options <sup>IV</sup>:
1. Serial port (9-pin; D-sub) x 1 + External VGA
(15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA
(15-pin; D-sub) x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1

+ 2<sup>nd</sup> LAN (RJ45) x 1

Communication Interface

10 / 100 / 1000 base-T Ethernet Intel® Wi-Fi 6E AX211, 802.11ax

Bluetooth (v5.3)

Optional: Dedicated GPS

Optional: 4G LTE mobile broadband with integrated GPS

Optional: 5G Sub-6 with integrated GPS vi

**Security Features** TPM 2.0

Kensington lock

Smart card reader Optional: Fingerprint reader vii

Optional: HF RFID reader vi, viiii Optional: Windows Hello face-authentication

camera (front-facing) \*\*\*

Power

AC adapter (90W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2 LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 34.9 mm (13.46" x 11.06" x 1.37") 2.32kg (5.11lbs) vi

Rugged Feature MIL-STD-810H certified IP66 certified

MIL-STD-461G certified <sup>x</sup> Vibration & 6ft (1.8m) drop resistant Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) <sup>xi</sup> Optional: Salt fog certified

**Environmental Specification** 

Temperature <sup>xii</sup>:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F

Office Dock

Humidity:

- 95% RH, non-condensing

Pre-installed software

**Getac Utility** 

Getac Geolocation Getac Barcode Manager xiii

Optional: Absolute Persistence®

	Venicle Bock	Office Bock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (GPS, WWAN, WLAN)	-

Vehicle Dock

### B360 FULLY **RUGGED NOTEBOOK**

Optional software

Getac Driving Safety Utility
Getac Device Monitoring System (GDMS) Getac VGPS Utility

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)

AC adapter (90W, 100-240VAC) Capacitive stylus with tether

Carry bag
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Office dock AC adapter (120W, 100-240VAC)
MIL-STD-461 AC adapter (120W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC) Capacitive stylus with tether Protection film Vehicle cradle Vehicle dock Office dock Spare SSD kit 100W Type-C adapter

**Bumper-to-Bumper warranty** 

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

Units equipped with dual channel memory come with Intel® Iris® X® II.

Units equipped with dual channel memory come with Intel<sup>®</sup> Iris<sup>®</sup> X<sup>®</sup> Graphics. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase. Units with 4G LTE option come with an embedded SIM card slot. External VGA and Display port are mutually exclusive. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, user may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. Support GFS, GLONASS, Gallieo, Belbou and QZSS. Fingerprint reader and H RFID reader are mutually exclusive. HF(13.56MHz) combo HF RFID/MFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Miffare and Felica Wiccompliant). Weight and dimensions vary from configurations and optional accessories.

accessories.
MIL-STD-461 90W AC adapter sold separately.
Available with limited configurations and environment conditions
Tested by an independent third-party test lab following MILSTD-810H.

STD-810H. Available when barcode reader option is selected. Models require either embedded or standalone GPS module. Gamber Johnson and Havis vehicle docks are e-mark certified. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

## Getac

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com I

www.getac.com/en/Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.